

## Eastto Marquench Oils 220, 460

### Eastto Marquench Oils 220, 460

**INTRODUCTION:** EASTTO MARQUENCH OILS have been developed from highly refined base stocks with specially selected additives for mar quenching applications and are having excellent oxidation and thermal stability. These long life oils have also good chemical stability, high boiling points, low volatility, high flash and fire points


**APPLICATION:** EASTTO MARQUENCH OILS are suitable for usage at bath temperatures of 150°C to 220°C and are recommended for all mar quenching operations which require high quenching speed e.g., Mass production of high precision products such as Automotive components, Bearings, Nut bolts, Industrial parts, Rod, Tools and Dies with low distortion due to quenching.

**PERFORMANCE LEVEL:** EASTTO MARQUENCH OILS meet IS: 4543 - 1977 (RA 2004)

### TYPICAL PROPERTIES

PROPERTIES	EASTTO MARQUENCH 220	EASTTO MARQUENCH 460
Kinematic Viscosity at 100°C., cSt,	220	460
Viscosity Index, Min.	90	90
Flash Point, COC, °C.	240	280
Pour Point, °C. Max.	-6	-6

**PACKING:** 210 Litres Drums

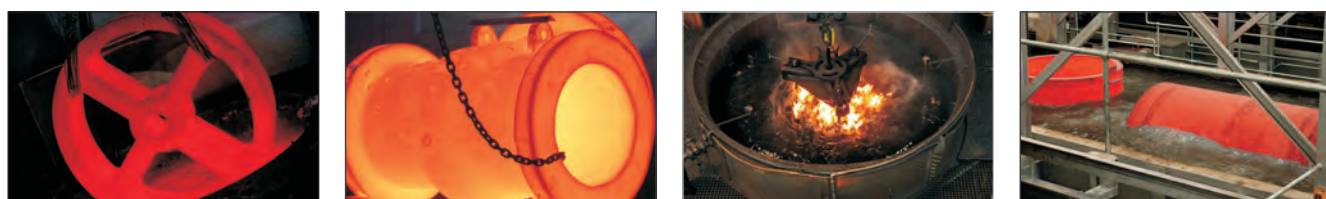

### Eastern Petroleum Private Limited

#### Regd. Off.:

Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg,  
(Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India.  
Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990  
Email: office@easternpetroleum.in, office@eastto.in,  
Web: www.easternpetroleum.in, www.eastto.in



## Eastern Petroleum Private Limited

an ISO 9001-2008 certified company



## Eastto Eastto Marquench Oils 220,460