

## Eastto Shock Absorber Oil 12, 18

GRADE: 12 & 18

### INTRODUCTION:

**Eastto** SHOCK ABSORBER OIL 12, 18 are blended from high viscosity index oils and specially selected additives to provide excellent anti-wear, anti-rust and anti-oxidation properties. EASTTO SHOCK ABSORBER OIL 12, 18 have very good chemical stability, excellent seal compatibility and very low pour point (for usage over wide range of temperature variations) with excellent dampening characteristics.

### APPLICATION:

EASTTO SHOCK ABSORBER OIL 12, 18 are recommended for use in shock absorbers

**PERFORMANCE LEVEL:** Proprietary

### TYPICAL PROPERTIES:

CHARACTERISTICS	EASTTO SHOCK ABSORBER OIL 12	EASTTO SHOCK ABSORBER OIL 18
Kinematic Viscosity at 40°C., cSt,	11.0 - 13.0	17.0 - 19.0
Viscosity Index, Min.	45	45
Flash Point, COC, °C, Min.	145	160
Pour Point, °C, Max.	(-) 39	(-) 36

**PACKING:** 210 Litres Drum



### Eastern Petroleum Private Limited


#### Regd. Off.:

Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg,  
(Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India.  
Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990  
Email: office@easternpetroleum.in, office@eastto.in,  
Web: www.easternpetroleum.in, www.eastto.in



Eastern Petroleum Private Limited

an ISO 9001-2008 certified company

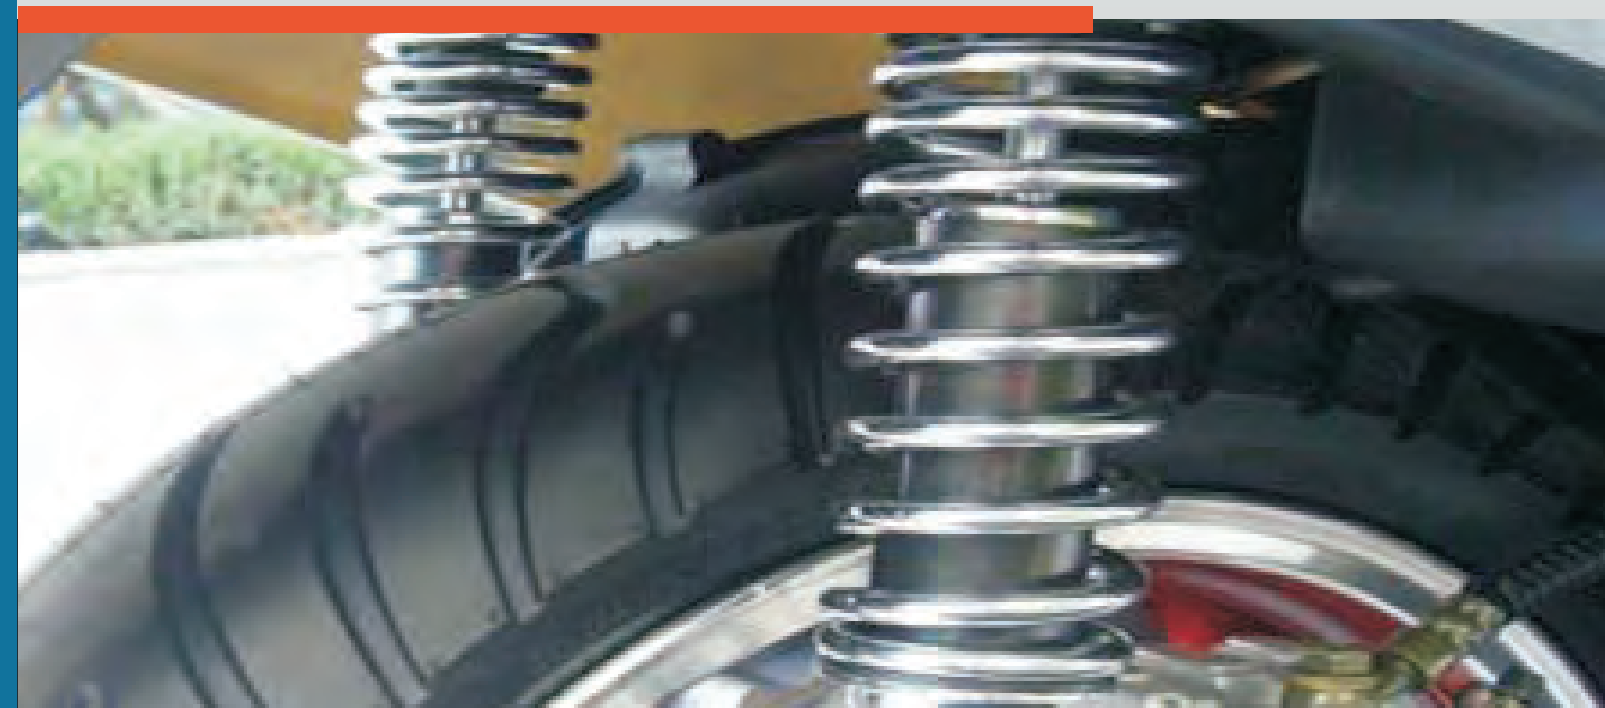

## Eastto Shock Absorber Oil 12, 18