


PRODUCT DATA SHEET

PRODUCT: EASTTO COMPRESSOR OILS

GRADES: 32, 46, 68, 100, 150, 220, 320

INTRODUCTION: EASTTO COMPRESSOR OILS - 32, 46, 68, 100, 150, 220, and 320 are blended from highly refined based stocks with antioxidant and rust inhibitor. They provide excellent lubrication under high temperature and high load conditions.

APPLICATION: EASTTO COMPRESSOR OILS - 32, 46, 68, 100, 150, 220 and 320 are recommended for cylinder lubrication of reciprocating compressors and rotary air compressor operating up to 220°C air discharge temperature. It can be used for vacuum pump, Circulating systems and Hydraulic systems.

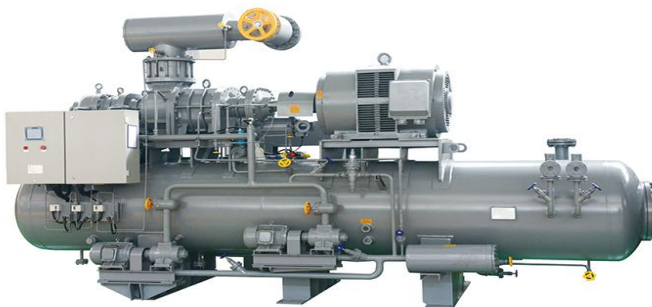

PERFORMANCE LEVEL: Meet requirements of cylinder lubricants in reciprocating and rotary air compressors.

TYPICAL PROPERTIES:

CHARACTERISTICS	EASTTO COMPRESSOR OILS						
	32	46	68	100	150	220	320
Kinematic Viscosity at 40°C, cSt.	32	46	68	100	150	220	320
Viscosity Index	95	95	95	95	95	95	95
Flash Point, COC, °C	190	190	200	200	210	220	220
Pour Point, °C	-6	-6	-6	-6	-6	-6	-6

PACKING: 210 Litres Drum

Date of Issue : 13.09.2014

Date of Revision: 05.08.2016

PDS No. 03.23.01 – 03.23.07

These Characteristics are typical of current production while future production will confirm to **EASTERN PETROLEUM PVT. LTD.** Specification variation in these characteristics may occur.

