

## Eastto Compress Oils

GRADES: 32, 46, 68, 100, 150, 220 & 320

### Introduction:

**Eastto** Compress Oils - 32, 46, 68, 100, 150, 220 & 320 are blended from highly refined based stocks with antioxidant and rust inhibitor. They provide excellent lubrication under high temperature and high load conditions.

### APPLICATION:

EASTTO COMPRESS OILS - 32, 46, 68, 100, 150, 220 & 320 are recommended for cylinder lubrication of reciprocating compressors and rotary air compressor operating up to 220°C air discharge temperature.

**PERFORMANCE LEVEL:** Meet requirements of cylinder lubricants in reciprocating and rotary air compressors.

### TYPICAL PROPERTIES

CHARACTERISTICS	EASTTO COMPRESS OILS						
	32	46	68	100	150	220	320
Kinematic Viscosity at 40°C, cSt	30 to 34	44 to 48	66 to 70	95 to 105	145 to 155	210 to 230	310 to 330
Viscosity Index, Min..	95	95	95	95	95	95	95
Flash Point, COC, °C, Min.	190	190	200	200	210	220	220
Pour Point, °C. Max.	-6	v	-6	-6	-6	-6	-6

**PACKING:** 210 Litres Drum




### Eastern Petroleum Private Limited

Regd. Off.:  
Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg,  
(Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India.  
Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990  
Email: office@easternpetroleum.in, office@eastto.in,  
Web: www.easternpetroleum.in, www.eastto.in



Eastern Petroleum Private Limited

an ISO 9001-2008 certified company

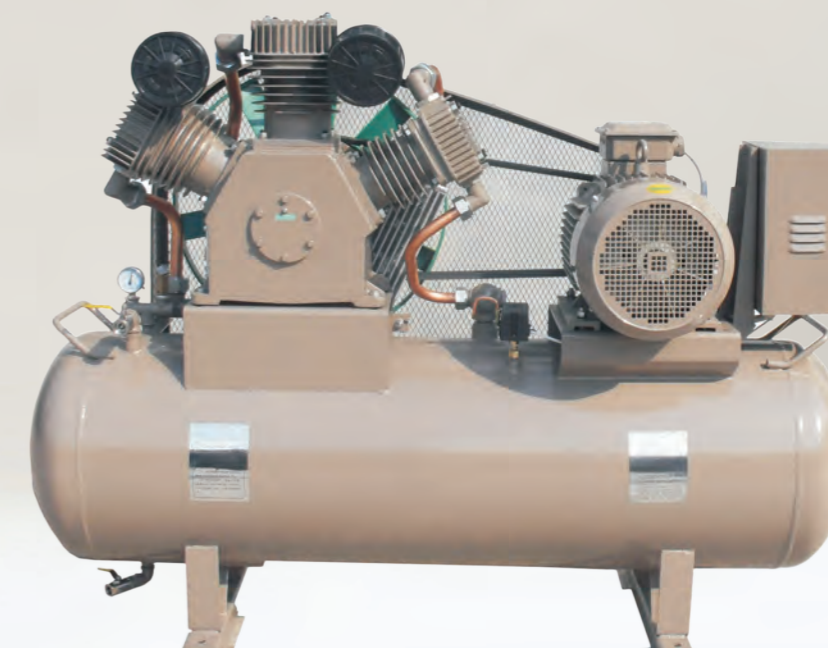

## Eastto Compress Oils