

Eastto Neat Cutting Oil 433

INTRODUCTION: EASTTO NEAT CUTTING OIL 433 contains sulphurised fat and chlorinated additives to impart extreme pressure property to cutting operations of low speeds at low or moderate temperature.


APPLICATION: EASTTO NEAT CUTTING OIL 433 is recommended for multipurpose machining operations of ferrous and non-ferrous metals without discolouration e.g. Gear hobbing and shaving, Spline hob cutting, Drilling, Tapping, Milling, Reaming, Gear chamfering, Notching and Punching..

PERFORMANCE LEVEL : EASTTO NEATCUTTING OIL 433 is a proprietary product.

TYPICAL PROPERTIES:

CHARACTERISTICS	EASTTO NEATCUTTING OIL 433
Kinematic Viscosity at 40°C, cSt	32
Flash Point, COC,°C	170
Copper Strip Corrosion for 3 Hrs. at 100°C	1
Sap Value, mg KOH/gm	4

PACKING: 210 Litres Drums

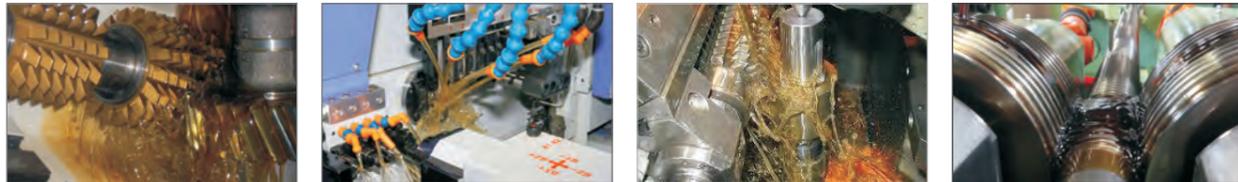

Eastern Petroleum Private Limited

Regd. Off.:
Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg,
(Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India.
Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990
Email: office@easternpetroleum.in, office@eastto.in,
Web: www.easternpetroleum.in, www.eastto.in



Eastern Petroleum Private Limited

an ISO 9001-2008 certified company



Eastto Neat Cutting Oil 433