


PRODUCT DATA SHEET

PRODUCT: EASTTO TEXTILE OILS

GRADE: ISO VG 12, 22 & 32

INTRODUCTION: EASTTO TEXTILE OILS are recommended for the lubrication of high speed spindles of Textile Mills and other Machine Tools as antistatic oil. These low viscosity spindle oils are manufactured from highly refined base stocks having excellent oxidation and rust stability and further fortified with oxidation and rust inhibitor, antistatic, antiwear and antifoam agents for better performance.

APPLICATION: EASTTO TEXTILE OILS are used for high speed spindles of Textile Mills and other Machine Tools where there is a need for antistatic oil with scourable characteristics.

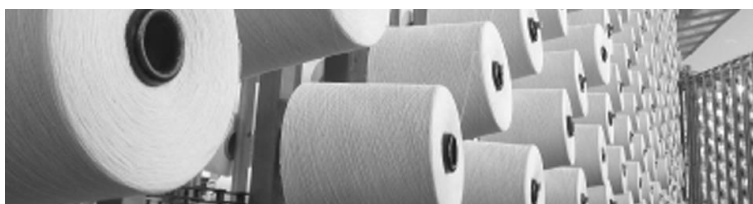

Used for high speed spindles of Textile Mills.

PERFORMANCE LEVEL: Proprietary Grades

CHARACTERISTICS	EASTTO TEXTILE OILS		
Grade	12	22	32
KV at 40°C	11.0 – 13.0	20.0 – 24.0	30.0 – 34.0
VI, Min.	90	90	90
Flash Point, COC, °C. Min	140	150	160
Copper Strip Corrosion Test at 100°C for 3 Hours, Max.	1	1	1

PACKING: 210 Litres Drums

Date of issue: 31.12.2014

PDS No. 10.15.01 – 10.15.03

These are typical figures and do not constitute a specification. In pursuit of continuous improvement, these figures may be changed without notice at the sole discretion of EASTERN PETROLEUM PVT. LTD.

