


PRODUCT DATA SHEET

PRODUCT: EASTTO BAN DWX 132

GRADE: SOFT FILM RUST PREVENTIVE

INTRODUCTION: EASTTO BAN DWX 132 is high quality rust preventive which forms soft greasy and temporary protective film on the evaporation of the solvent. This rust preventive has very good water displacement characteristics and finger print neutralization property.

APPLICATION: EASTTO BAN DWX 132 can be applied by immersion, brush, swab or spray for protecting Metal sheets, Steel wire, Ball and roller bearings, Nails, Automotive spare parts, Nut bolts, Metal tube pipes, Gear box parts, Pistons, Metal rod, Machined parts, Gear box parts and wire rope from corrosion and rust.

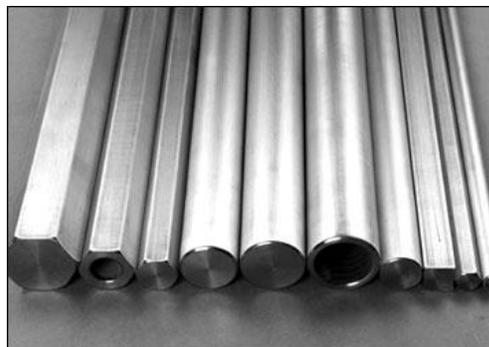

This rust preventive has very good dewatering characteristics.

PERFORMANCE LEVEL: EASTTO BAN DWX 132 is a proprietary product.

TYPICAL PROPERTIES

CHARACTERISTICS	EASTTO BAN DWX 132
Appearance	Clear to Hazy Brown Liquid
Density @ 30 ,°C	0.82
Flash Point, PMCC,°C., Min.	40
Copper Strip Corrosion Test at 100°C for 3 Hrs.	1

PACKING: 210 Litres Drums

Date of issue : 10.11.2014

Date of revision: 03.08.2016

PDS No 05.80.29

These Characteristics are typical of current production while future production will confirm to **EASTERN PETROLEUM PVT. LTD.** Specification variation in these characteristics may occur.

