

Eastto Neat Cutting Oil 137

INTRODUCTION: EASTTO NEATCUTTING OIL 137 is staining type neat cutting oil manufactured from highly refined base stocks of medium viscosity and fatty oils for improved wetting characteristics to impart good heat dissipation characteristics and also with active sulphur and chlorinated additive to impart EP properties.


APPLICATION: EASTTO NEATCUTTING OIL 137 is recommended for heavy duty applications like gear shaping, Threading, Turning, Punching, Milling, Surface broaching, Drilling, Gear chamfering, Line and fine boring and less severe machining operations on high tensile steel, stainless steel and some alloys.

PERFORMANCE LEVEL : EASTTO NEATCUTTING OIL 137 is a proprietary product.

TYPICAL PROPERTIES:

CHARACTERISTICS	EASTTO NEATCUTTING OIL 137
Kinematic Viscosity at 40°C, cSt	32
Flash Point, COC,°C	160
Copper Strip Corrosion for 3 Hrs. at 100°C	4
Sap Value, mg KOH/gm	5

PACKING: 210 Litres Drums

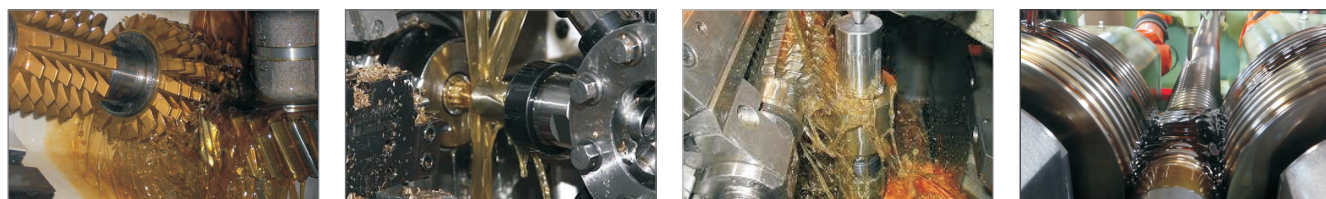

Eastern Petroleum Private Limited

Regd. Off.:
Unit No. 1, Riddhi Siddhi, Corporate Park, V. N. Purav Marg,
(Sion Trombay Road), Chembur, Mumbai - 400 071. MH, India.
Tel.: +91 - 22 - 4232 4121, +91 - 22 - 2529 9990
Email: office@easternpetroleum.in, office@eastto.in,
Web: www.easternpetroleum.in, www.eastto.in



Eastern Petroleum Private Limited

an ISO 9001-2008 certified company



Eastto Neat Cutting Oil 137